

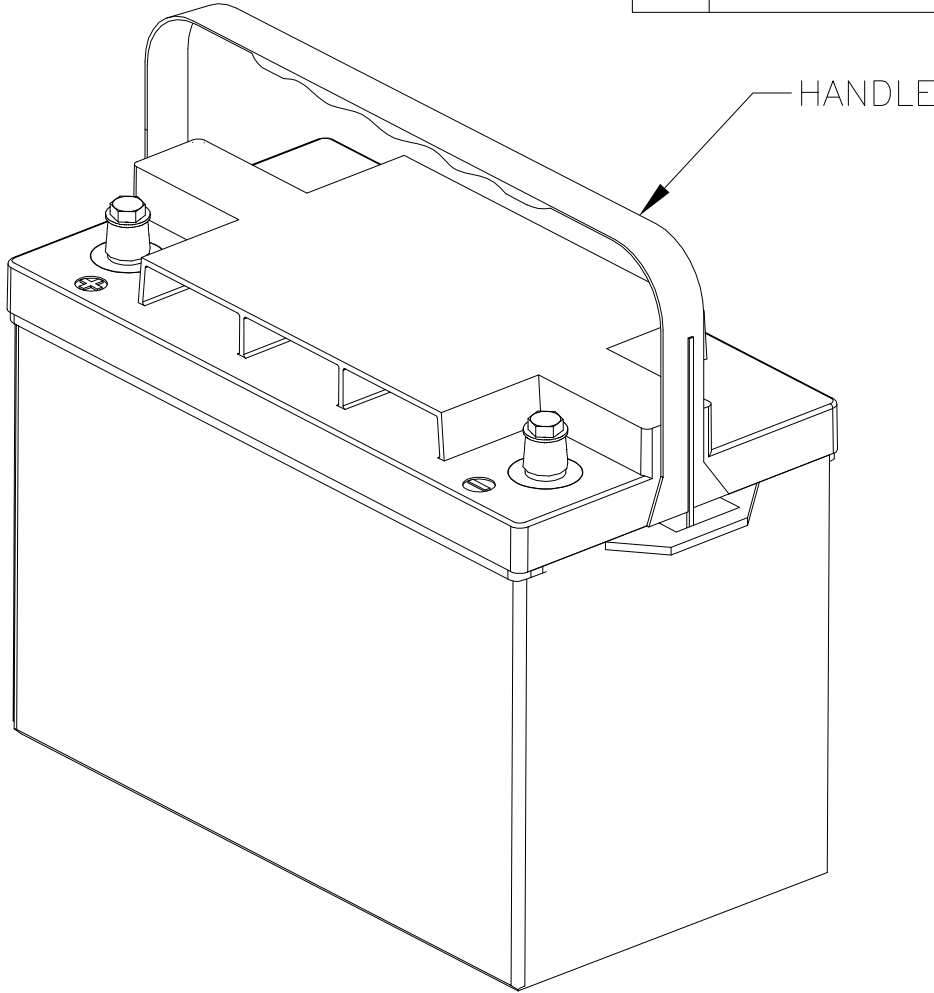
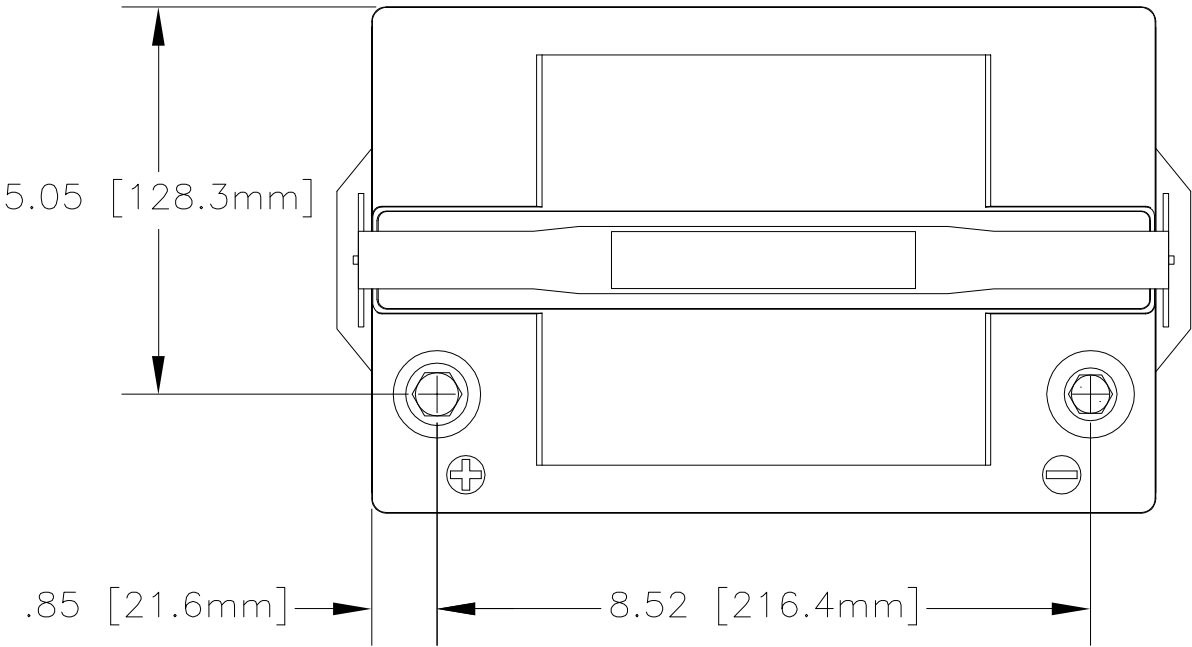


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. SEE DRAWING NO. CB-00288 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 - 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
 - 3. ALL DIMENSIONS ARE IN INCHES [MM].

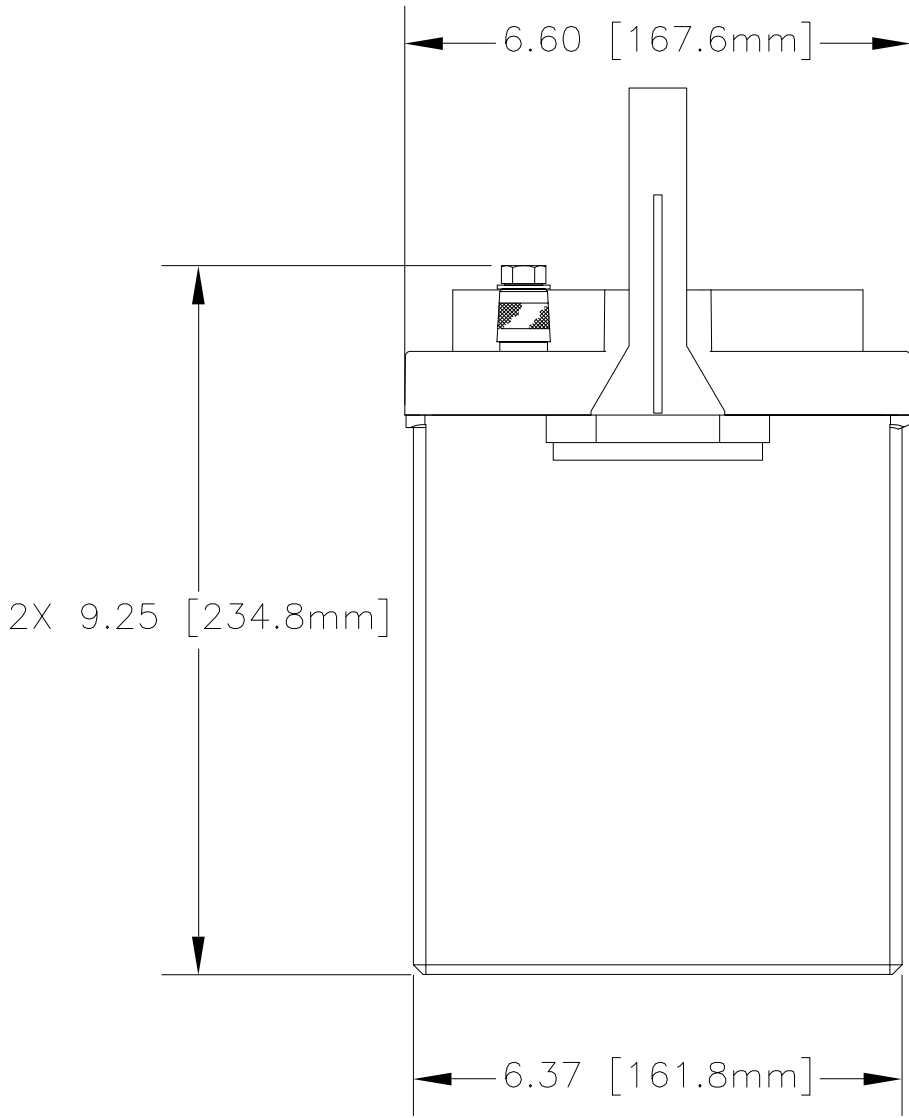

REFERENCE VIEW

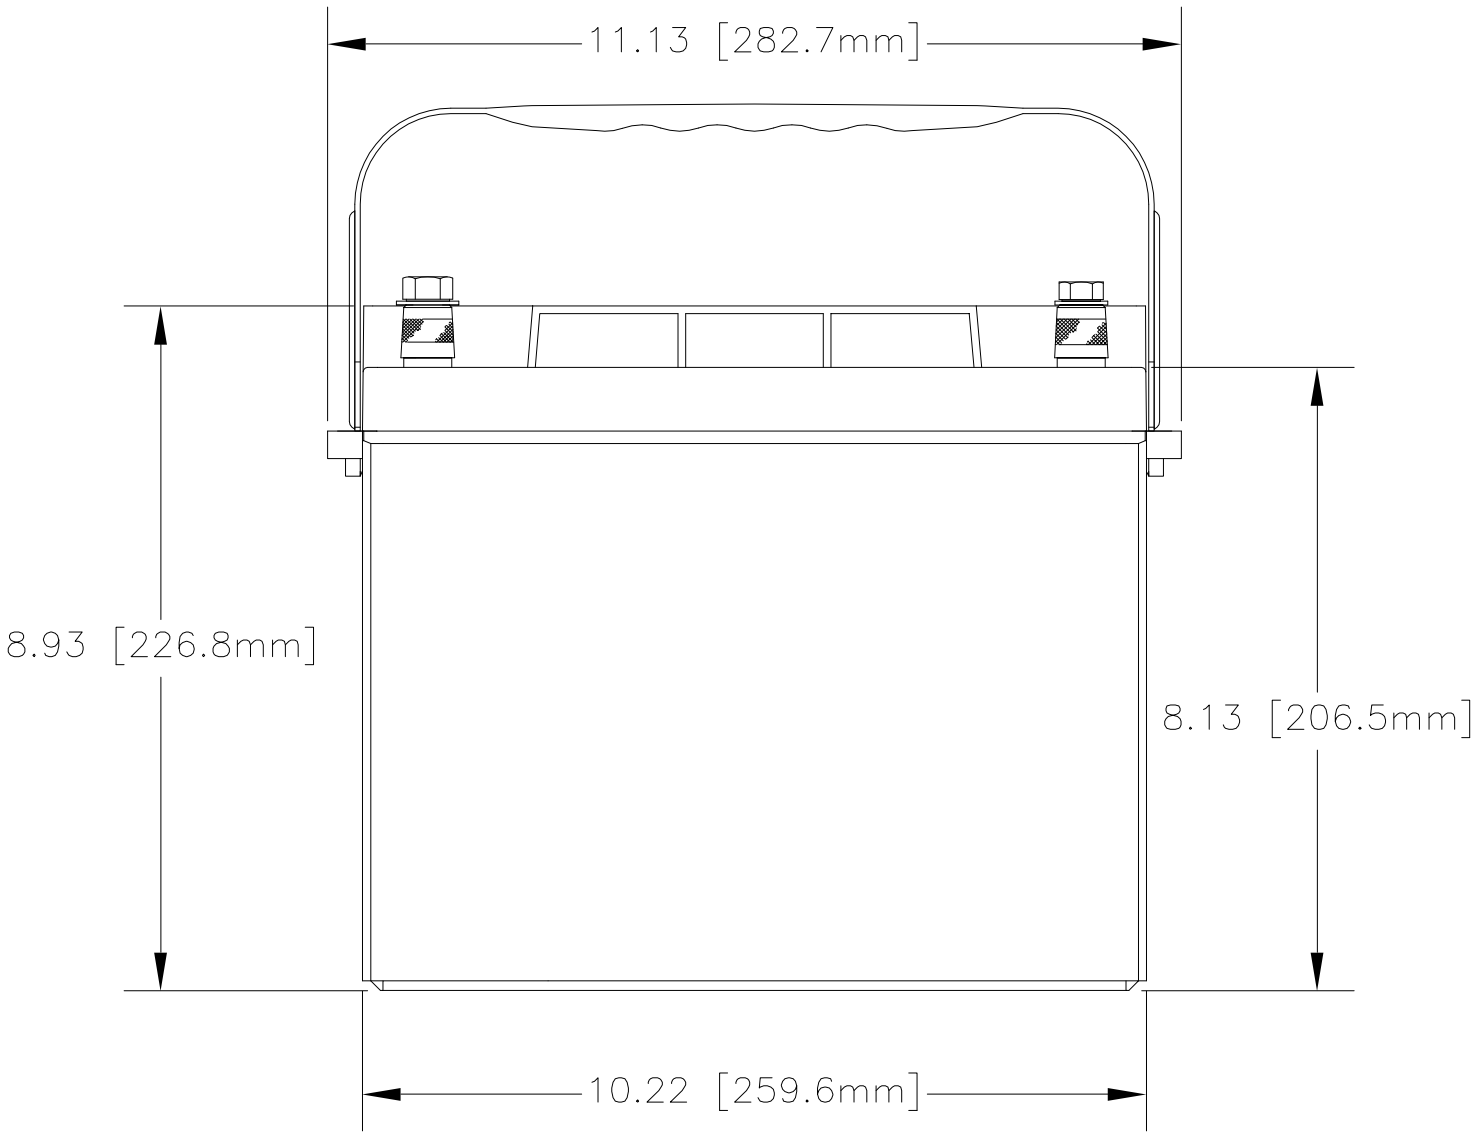

ENVELOPE DRAWING

CAPACITY RATE	
PART NUMBER	GPL-24T
NOMINAL WEIGHT	56 LBS [25.5 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	80 AH
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25°C)	149 MIN

QTY REQD		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION		ITEM NO.
PARTS LIST										
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .060				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790				
				APPROVALS						DATE
				DRAWN		ELH	3/13/00	TITLE BATTERY, 12 VOLT, GPL-24T		
TREATMENT		NONE	CHECKED	S. VALDEZ	3/13/00	SIZE	CAGE CODE	DWG NO.	REV	
FINISH		NONE	APPROVED	JBT	3/16/00	C	63017	GPL-24T	A	
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED	AT	5/23/02	SCALE	NONE	SHEET 1 OF 1	