

JDG12-150




General Features

- > Nanosilica colloidal electrolyte and high tin positive plate alloy design to enhance battery performance
- > Relatively rich electrolyte, high temperature and low temperature performance is superior
- > Long cycle life, excellent deep cycle discharge ability
- > Excellent charge acceptance ability
- > Precision sealing technology
- > Long life



Dimension: 483(L) × 170(W) × 241(H) × 241(TH) Unit: mm

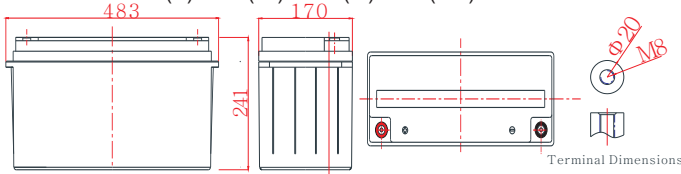

Applications

- > Solar / wind energy and other new energy storage
- > UPS/EPS
- > Power systems
- > Telecommunications system
- > Emergency lighting, Auto control system
- > Other general purpose

Specification

Nominal Voltage	12V
Nominal Capacity	150Ah
Design life	10 years
Terminal	M8
Approx. Weight	Approx 45.0kg (99.2lbs)
Container Material	ABS
Rated Capacity	150Ah 10Hour Rate (15.0A to 10.8V)
	119Ah 3Hour Rate (39.5A to 10.8V)
	96.2Ah 1Hour Rate (96.2A to 10.5V)
Internal resistance	Full charged at 25°C: 3.6 mΩ
Max. Discharge Current	1800A(5S)
Operating Temperature	Discharge: -40 ~60°C (-40~ 140°F)
	Charge: -20 ~50°C (-4~ 122°F)
	Storage: -20 ~50°C (-4~ 122°F)
Charge current:	Max. 37.5A ; Recom. 15.0A
Charge Method (25°C)	Float Charge: 13.5-13.8V, recom. 13.5V (-18mV/°C)
	Equalize charge: 13.8-14.1V, recom. 14.1V (-24mV/°C)
	Cycle charge: 14.4-15.0V, recom. 14.4V (-30mV/°C)
Self discharge	3% of capacity declined per month at 25°C

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	275	168	99.0	56.8	41.2	27.7	18.2	15.5	8.15
1.65V	267	165	98.4	56.5	40.8	27.4	18.0	15.4	8.10
1.70V	261	162	97.7	56.0	40.2	27.1	17.9	15.2	5.01
1.75V	253	160	96.2	55.2	39.8	26.8	17.7	15.1	5.00
1.80V	236	153	93.8	54.2	39.5	26.1	17.6	15.0	7.98
1.85V	210	140	86.9	51.4	37.2	24.8	16.8	14.5	7.85

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	485	303	187	107	78.4	52.4	35.3	29.9	16.1
1.65V	477	300	186	107	77.4	52.1	35.0	29.6	16.0
1.70V	471	300	184	107	76.9	51.7	34.9	29.3	16.0
1.75V	468	299	183	106	76.5	51.4	34.6	29.0	15.9
1.80V	443	292	181	106	76.2	50.9	34.3	28.7	15.8
1.85V	396	267	168	101	72.5	48.5	33.1	28.2	15.7

JDG12-150


Discharge characteristic

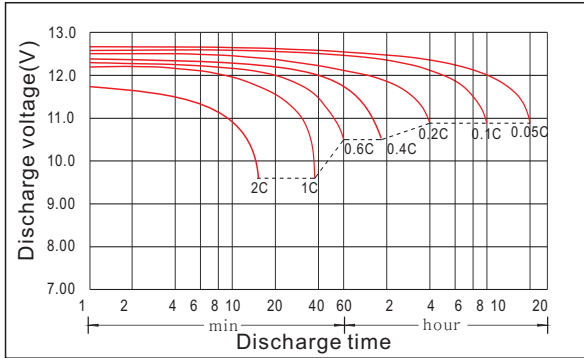


Charging characteristic

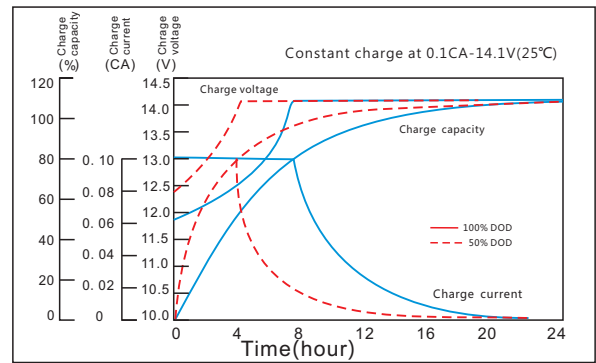


The effect of temperature on capacity

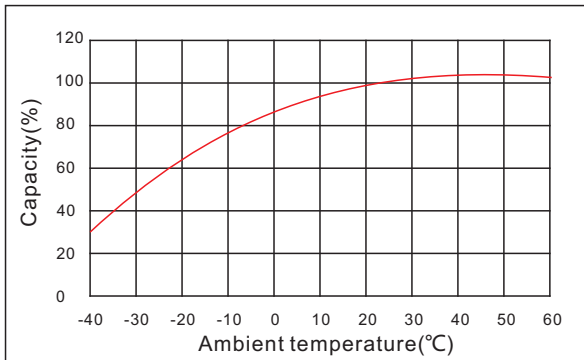


The effect of discharge depth on cycle life

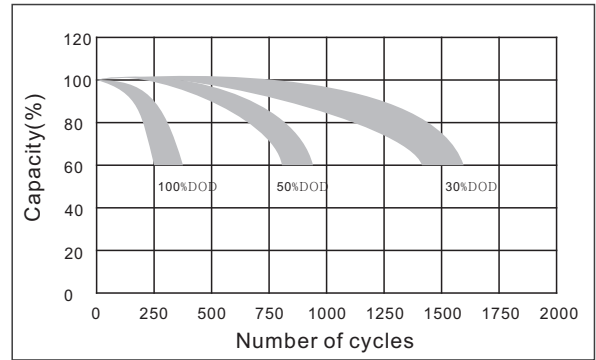

Curves of self-discharge

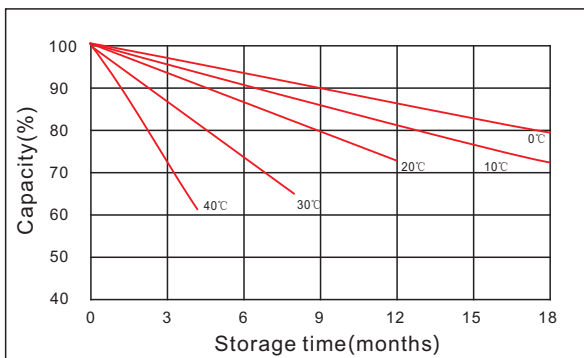

Curves of open circuit voltage vs. capacity

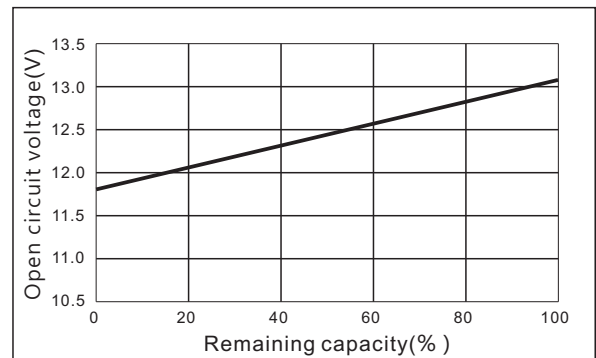

www.kijo.com.cn info@kijo.com.cn

Jiangxi Jingjiu Power Science&Technology Co. Ltd.
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779 +86-791-85989842

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

